• LED SAFETY LIGHTS •

October 2018



Multiple Mounting Options

Magnetic, Solid, or Slotted Handles- (high & low profiles; long or short handles)





Dome Diffus	ser Blast Shield
Product Features	
Approved for:	Suitable for simultaneous use in Class I, Div 1 & 2, Group C & D Class II, Div 1 & 2, Group E, F, & G CSA Zones 1 & 2; Zones 20, 21, & 22
Conforms to:	UL Stds 153, 8750, 844;
Certified to:	CSA Stds. C22.2#s 12, 25, 30, 137, 250.13
Suitable for:	Wet Location Use (NEMA Type 6P)
Certified:	Portable Luminary, Portable Luminaire
Temperature Rating:	T-code: T5, (-25° to +40°C)
LED Color:	~6000K, CRI >70
Light Head Power:	21VDC, 800mA, LVLE
Illuminous:	26,000 lux at 1ft
Light Output:	>2,500 lumens
Reflective Optic Beam Angle:	60°
Weight:	3.5 lbs (light head only) 4.2-5.3 lbs (light head w/ handle)
Dimensions:	6"L x 2.9"W x 2.3"H
Material:	Machined out of solid blocks of 6061-T6 Aluminum Polyurethane Bumpers
Accessories:	Blast Shields, Dome Diffuser, Overspray Protection Bags
Variable Mounting Options:	Magnetic, Solid and Slotted Handles (High & Low Profiles, Short and Long Handles)



The BRICKette™ - Complete System Example
Exp Proof or Non-Exp Proof power box, various cord lengths, & various plug options available









EXPLOSION

PROOF


LIGHTING


CONFIGURATIONS & MOUNTING

The BRICKette[™] packs a level of versatility and durability like no other hand-held work light. Because of it's compact size, we have the flexibility to power up to five lights from one power box. The handles are purpose built; providing better ergonomics and maybe used as a stand or a mount.

Model 2106 - Portable Explosion Proof LED Work Light

October 2018

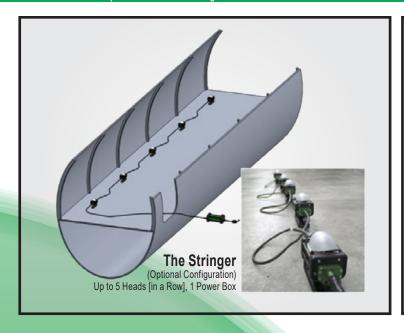

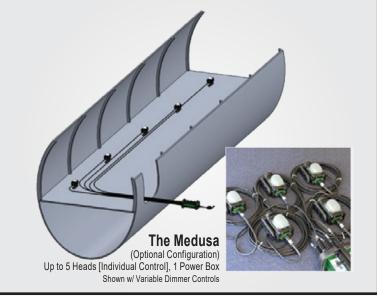

















LIBERTY SALES & DISTRIBUTION

Hatfield & Washington, PA
Ph: (877) 373-0118 Fx: (888) 850-3787
sales@libertysales.net www.libertysales.net