




NATURAL GAS Product Bulletin

861 & 8277 Series Inline Bypass Ball Valves



861 Series



8277 Series

TAMPERPROOF, 175 PSIG, LOCKWING, BYPASS OPTION, BRASS BALL FULL PORT
These valves are designed for use with natural, manufactured and L.P. gas only.

861 SERIES

FNPT x FNPT

FINISH OPTIONS


- 861A ArmorGalv® Thermal-Diffusion Zinc
- 861B Black Cast Iron
- 861C ArmorGalv® Thermal-Diffusion Zinc and Painted
- 861PNT Painted

8277 SERIES


FNPT x Insulated Union with FNPT Tailpiece (o-ring only)

FINISH OPTIONS

- 8277A ArmorGalv® Thermal-Diffusion Zinc
- 8277B Black Cast Iron
- 8277C ArmorGalv® Thermal-Diffusion Zinc and Painted
- 8277PNT Painted

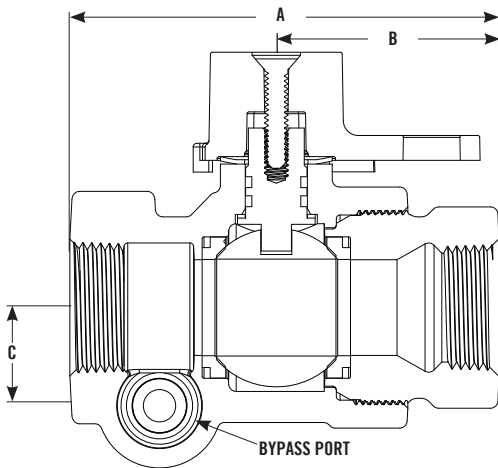

Inline Bypass Valve
Instruction Sheet

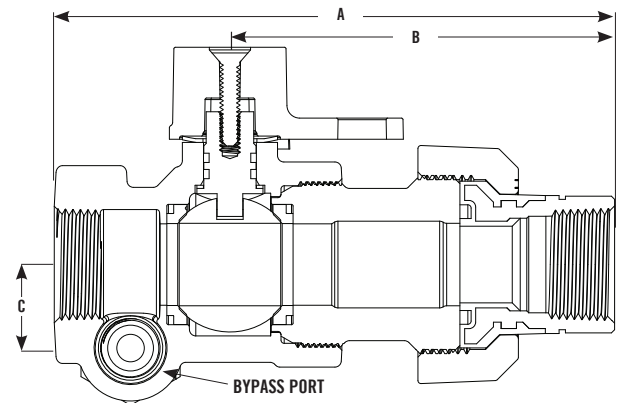

DIMENSIONS

Size	A	B	C	Bypass Port
3/4"	3.5"	1.8"	.8"	1/4"
1"	3.6"	1.9"	1.0"	1/4"
1 1/4"	5.2"	2.5"	1.4"	3/4"

861KEY & 861KEY 1 1/4"
Stainless Steel Inline Bypass Ball Valve Key. A security key is required for bypass operation. Contact factory.

DIMENSIONS

Size	A	B	C	Bypass Port
3/4"	5.3"	3.6"	.8"	1/4"
1"	5.8"	4.15"	1.0"	1/4"
1 1/4"	7.6"	5.1"	1.4"	3/4"



Check Out Our
Digital Catalogs

sales@aymcdonald.com | 800.292.2737

Visit Us At
aymcdonald.com

